

Life Is On


Schneider
Electric



Essential touch-screen panels for your small automation systems.

Magelis Easy GXU

Magelis™ Easy GXU, essential touch-screen terminals, address the challenges faced by new economies: fit for purpose at affordable prices with no compromise on ease of use, robustness, and availability ... the core values supported by a worldwide leader in automation.

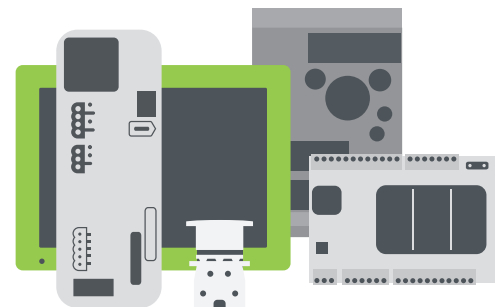


HMI

schneider-electric.x/productURL

When just enough is just right!

Magelis Easy GXU HMI

The range of Magelis Easy GXU touch-screen terminals consists of two models with two sizes of color TFT screen: Magelis Easy GXU Basic and Universal

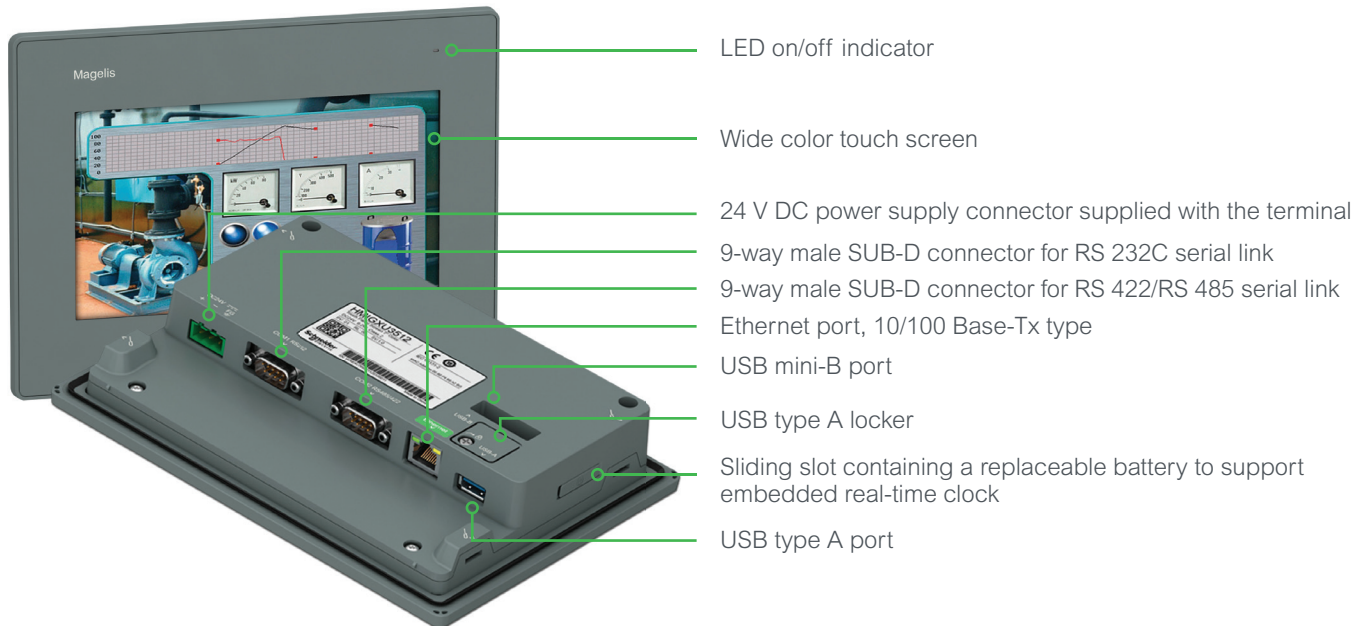

- LED on/off indicator
- Wide color touch screen
- 24 V DC power supply connector supplied with the terminal
- 9-way male SUB-D connector for RS 232C serial link
- 9-way male SUB-D connector for RS 422/RS 485 serial link
- Ethernet port, 10/100 Base-Tx type
- USB mini-B port
- USB type A locker
- Sliding slot containing a replaceable battery to support embedded real-time clock
- USB type A port

Selection guide

Features	Magelis Easy GXU Basic		Magelis Easy GXU Universal	
	HMIGXU3500	HMIGXU5500	HMIGXU3512	HMIGXU5512
Screen size	7" wide	10.1" wide	7" wide	10.1" wide
Screen color and specification	65536 color TFT, WVGA 800 x 480 pixels			
User application memory	32 MB		48 MB	
DDR memory	128 MB		128 MB	
USB for downloading	Mini-USB x1			
USB for extension	None		USB type A x 1	
Serial COM1	RS422/485		RS232C	
Serial COM2	None		RS422/485	
Ethernet	None		10/100 Base-Tx	
RTC	support (with replaceable battery)			
Operation temperature	From 0 °C to +50 °C			
Storage temperature	From -20 °C to +60 °C			
Protection level	IP65f			
Standards	CE, RoHS			
Harsh environment	PCBA conform coating			
Installation cut-out (mm)	190 x 135	255 x 185	190 x 135	255 x 185



Vijeo™ Designer Basic software
Develop your applications quickly and efficiently

Fit for purpose:

- TFT color screens
- USB connection
- Ethernet port
- Compact design

Robustness:

- Embedded isolated power supply
- PCBA coating to resist to high humidity and polluted environments

Easiness:

- Anti-drop hooks
- Screw installation fasteners for one-handed installation
- Intuitive programming software Vijeo Designer Basic
- Sliding battery socket for maintenance

Availability

- Extensive distribution network

Schneider Electric Industries SAS
Head Office
35, rue Joseph Monier - CS 30323
F92506 Rueil-Malmaison Cedex
FRANCE

Phone: +33 (0) 1 41 29 70 00
schneider-electric.com

Life Is On

Schneider
Electric