



### Main

|                             |  |
|-----------------------------|--|
| Range of product            | Easy Modicon M200  |
| Product or component type   | Logic controller   |
| [Us] rated supply voltage   | 24 V DC  |
| Discrete I/O number         | 16   |
| Discrete input number       | I8: 1 regular input<br>I2...I5: 4 fast input<br>I0, I1, I6, I7: 4 high speed input |
| Discrete output number      | Q2...Q6: 5 transistor output<br>Q0...Q1: 2 fast output (PLS/PWM/PTO mode)          |
| Discrete input voltage      | 24 V   |
| Discrete input voltage type | DC   |
| Discrete input current      | 7 mA for input   |
| Discrete input logic        | Sink or source (positive/negative) type 1 conforming to EN/IEC 61131-2             |
| Discrete output voltage     | 24 V DC  |
| Discrete output current     | 0.5 A  |
| Discrete output type        | Transistor   |
| Discrete output logic       | Negative logic (sink)  |
| Power consumption in W      | 10 W at 24 V DC (with max I/O)   |

### Complementary

|  |  |
|--|--|
| Maximum number of I/O expansion module | 4 with 135 discrete output(s) for transistor output<br>4 with 64 discrete output(s) for relay output |
| Supply voltage limits                  | 20.4...28.8 V  |
| Inrush current                         | 35 A   |
| Voltage state 1 guaranteed             | $\geq 15$ V for input  |
| Voltage state 0 guaranteed             | $\leq 5$ V for input   |
| Input impedance                        | 3.3 kOhm for discrete input  |
| Response time                          | 1 ms turn-on, Q0...Q6 terminal(s) for output<br>1 ms turn-off, Q0...Q6 terminal(s) for output        |

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

|  |  |
|--|--|
|  | <p>5 µs turn-off, I0, I1, I6, I7 terminal(s) for high speed input</p> <p>5 µs turn-on, I0, I1, I6, I7 terminal(s) for high speed input</p> <p>100 µs turn-off, I2...I5 terminal(s) for fast input</p> <p>35 µs turn-on, I2...I5 terminal(s) for fast input</p> <p>100 µs turn-off, I8 terminal(s) for regular input</p> <p>35 µs turn-on, I8 terminal(s) for regular input</p> |
| Configurable filtering time            | <p>0 ms for input</p> <p>3 ms for input</p> <p>12 ms for input</p>   |
| Maximum current per output common      | 3.5 A at COM 0   |
| Output frequency                       | 100 kHz for fast output (PWM/PLS mode) at Q0...Q1  |
| Maximum leakage current                | 0.1 mA for transistor output   |
| Maximum voltage drop                   | <1 V   |
| Maximum tungsten load                  | <12 W for output and fast output   |
| Protection type                        | Overload and short-circuit protection at 3.8 A   |
| Reset time                             | 1 s automatic reset  |
| Memory capacity                        | 512 byte internal flash for backup of programs   |
| Data storage equipment                 | 32 GB micro SD card (optional)   |
| Battery type                           | BR2032 Li-CFx (Lithium-Carbon Monofluoride), battery life: 5 year(s)   |
| Backup time                            | 3 years at 25 °C (by interruption of power supply)   |
| Execution time for 1 KInstruction      | 0.3 ms for event and periodic task   |
| Execution time per instruction         | 0.2 µs Boolean   |
| Exct time for event task               | 60 µs response time  |
| Clock drift                            | <= 90 s/month at 25 °C   |
| Regulation loop                        | Adjustable PID regulator up to 14 simultaneous loops   |
| Positioning functions                  | PWM/PLS 2 channel(s) at 100 kHz  |
| Control signal type                    | <p>Quadrature (x1, x2, x4) at 100 kHz for fast input (HSC mode)</p> <p>Pulse/direction at 100 kHz for fast input (HSC mode)</p> <p>Single phase at 100 kHz for fast input (HSC mode)</p> <p>CW/CCW at 100 kHz for fast input (HSC mode)</p>  |
| Counting input number                  | 4 fast input (HSC mode) at 100 kHz 32 bits   |
| Integrated connection type             | <p>USB port with mini B USB 2.0 connector</p> <p>Non isolated serial link serial 1 with terminal block connector and RS485 interface</p> <p>Non isolated serial link serial 2 with terminal block connector and RS232/RS485 interface</p> <p>Isolated serial link serial 2 with terminal block connector and RS485 interface</p>   |
| Transmission rate                      | <p>1.2...115.2 kbit/s (115.2 kbit/s by default) for bus length of 15 m for RS485</p> <p>1.2...115.2 kbit/s (115.2 kbit/s by default) for bus length of 3 m for RS232</p> <p>12 Mbit/s for USB</p>  |
| Communication port protocol            | <p>USB port: USB - SoMachine-Network</p> <p>Non isolated serial link: Modbus master/slave - RTU/ASCII or SoMachine-Network</p>   |
| Local signalling                       | <p>1 LED (green)PWR:</p> <p>1 LED (green)RUN:</p> <p>1 LED (red)module error (ERR):</p> <p>1 LED (green)SD card access (SD):</p> <p>1 LED (red)BAT:</p> <p>1 LED (green)SL1:</p> <p>1 LED per channel (green)I/O state:</p>  |
| Electrical connection                  | <p>Mini B USB 2.0 connector for a programming terminal</p> <p>removable screw terminal block for inputs</p> <p>removable screw terminal block for outputs</p> <p>removable screw terminal block, 3 terminal(s) for connecting the 24 V DC power supply</p> <p>removable screw terminal block, 4 terminal(s) for connecting the serial link 1</p>                               |
| Maximum cable distance between devices | <p>Unshielded cable: &lt;50 m for input</p> <p>Shielded cable: &lt;10 m for fast input</p> <p>Shielded cable: &lt;10 m for high speed input</p> <p>Unshielded cable: &lt;150 m for output</p>  |
| Insulation                             | <p>Non-insulated between inputs</p> <p>Between input and internal logic at 500 V AC</p> <p>Between fast input and internal logic at 500 V AC</p> <p>Between input groups at 500 V AC</p> <p>Between output and internal logic at 500 V AC</p> <p>Between output groups at 500 V AC</p> <p>Between supply and internal logic at 500 V DC</p>                                    |

|                  |   |
|------------------|---|
| Marking          | CE  |
| Mounting support | Top hat type TH35-15 rail conforming to IEC 60715<br>Top hat type TH35-7.5 plate or panel with fixing kit conforming to IEC 60715 |
| Height           | 90 mm   |
| Depth            | 70 mm   |
| Width            | 110 mm  |
| Net weight       | 0.339 kg  |

## Environment

|                                       |   |
|---------------------------------------|---|
| IP degree of protection               | IP20 with protective cover in place   |
| Product certifications                | CSA<br>IACS E10<br>RCM<br>CULus   |
| Standards                             | EN/IEC 61010-2-201<br>EN/IEC 61131-2  |
| Electromagnetic compatibility         | Electrostatic discharge immunity test - test level: 8 kV (air discharge) conforming to EN/IEC 61000-4-2<br>Electrostatic discharge immunity test - test level: 6 kV (contact discharge) conforming to EN/IEC 61000-4-2<br>Susceptibility to electromagnetic fields - test level: 10 V/m (80 MHz...3 GHz) conforming to EN/IEC 61000-4-3<br>Magnetic field at power frequency - test level: 30 A/m conforming to EN/IEC 61000-4-8<br>Electrical fast transient/burst immunity test - test level: 2 kV (power lines) conforming to EN/IEC 61000-4-4<br>Electrical fast transient/burst immunity test - test level: 2 kV (relay output) conforming to EN/IEC 61000-4-4<br>Electrical fast transient/burst immunity test - test level: 1 kV (I/O) conforming to EN/IEC 61000-4-4<br>Electrical fast transient/burst immunity test - test level: 1 kV (serial link) conforming to EN/IEC 61000-4-4<br>1.2/50 µs shock waves immunity test - test level: 1 kV (power lines (DC)) conforming to EN/IEC 61000-4-5<br>1.2/50 µs shock waves immunity test - test level: 2 kV (power lines (AC)) conforming to EN/IEC 61000-4-5<br>1.2/50 µs shock waves immunity test - test level: 2 kV (relay output) conforming to EN/IEC 61000-4-5<br>1.2/50 µs shock waves immunity test - test level: 1 kV (I/O) conforming to EN/IEC 61000-4-5<br>1.2/50 µs shock waves immunity test - test level: 1 kV (shielded cable) conforming to EN/IEC 61000-4-5<br>1.2/50 µs shock waves immunity test - test level: 0.5 kV (power lines (DC)) conforming to EN/IEC 61000-4-5<br>1.2/50 µs shock waves immunity test - test level: 1 kV (power lines (AC)) conforming to EN/IEC 61000-4-5<br>Conducted RF disturbances - test level: 10 V (0.15...80 MHz) conforming to EN/IEC 61000-4-6<br>Conducted emission - test level: 79 dBµV/m QP/66 dBµV/m AV (power lines (AC)) conforming to EN/IEC 55011<br>Conducted emission - test level: 73 dBµV/m QP/60 dBµV/m AV (power lines (AC)) conforming to EN/IEC 55011<br>Radiated emission - test level: 40 dBµV/m QP class A (10 m) conforming to EN/IEC 55011<br>Radiated emission - test level: 47 dBµV/m QP class A (10 m) conforming to EN/IEC 55011 |
| Shock resistance                      | 15 gn for 11 ms<br>30 gn for 6 ms   |
| Immunity to microbreaks               | 2 ms  |
| Vibration resistance                  | 3.5 mm at 5...8.4 Hz on symmetrical rail<br>1 gn at 8.4...150 Hz on symmetrical rail<br>3.5 mm at 5...8.7 Hz on panel mounting<br>2 gn at 8.7...150 Hz on panel mounting  |
| Relative humidity                     | 10...95 %, without condensation (in operation)<br>10...95 %, without condensation (in storage)  |
| Ambient air temperature for operation | 0...55 °C (horizontal installation)   |
| Ambient air temperature for storage   | -25...70 °C   |
| Pollution degree                      | <= 2  |
| Operating altitude                    | 0...2000 m  |
| Storage altitude                      | 0...3000 m  |

## Packing Units

|                  |           |
|------------------|-----------|
| Package 1 Weight | 5.100 kg  |
| Package 1 Height | 9.000 cm  |
| Package 1 width  | 12.000 cm |
| Package 1 Length | 13.800 cm |

## Offer Sustainability


|                            |   |
|----------------------------|---|
| Sustainable offer status   | Green Premium product   |
| EU RoHS Directive          | Pro-active compliance (Product out of EU RoHS legal scope)<br><a href="#">EU RoHS Declaration</a>                           |
| Mercury free               | Yes   |
| RoHS exemption information | <a href="#">Yes</a>   |
| China RoHS Regulation      | <a href="#">China RoHS declaration</a>  |
| Environmental Disclosure   | <a href="#">Product Environmental Profile</a>   |
| Circularity Profile        | <a href="#">End of Life Information</a>   |
| WEEE                       | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins |

---

Dimensions Drawings


---

Dimensions

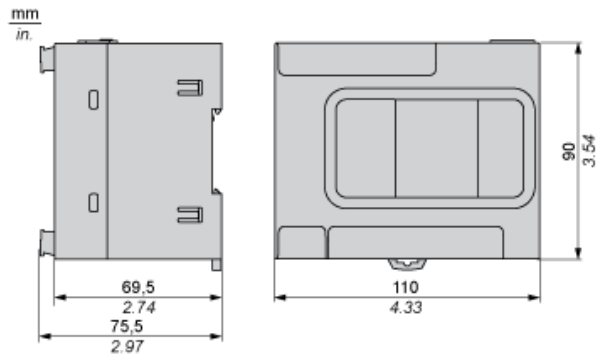


Mounting and Clearance


Mounting on a Rail





Direct Mounting on a Panel Surface

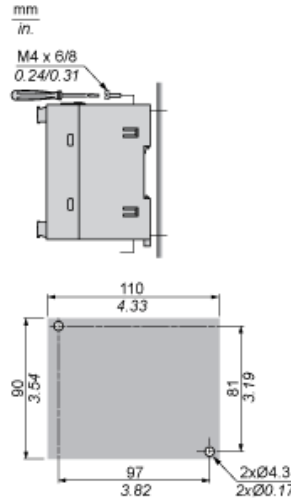



Mounting Position

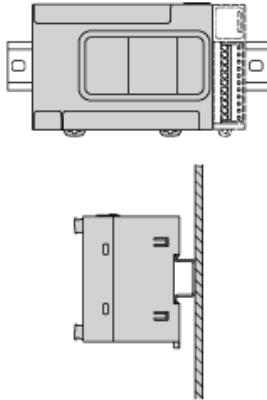




## Clearance


mm  
in.

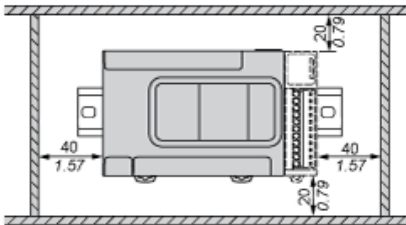



## TMCR2...Installation

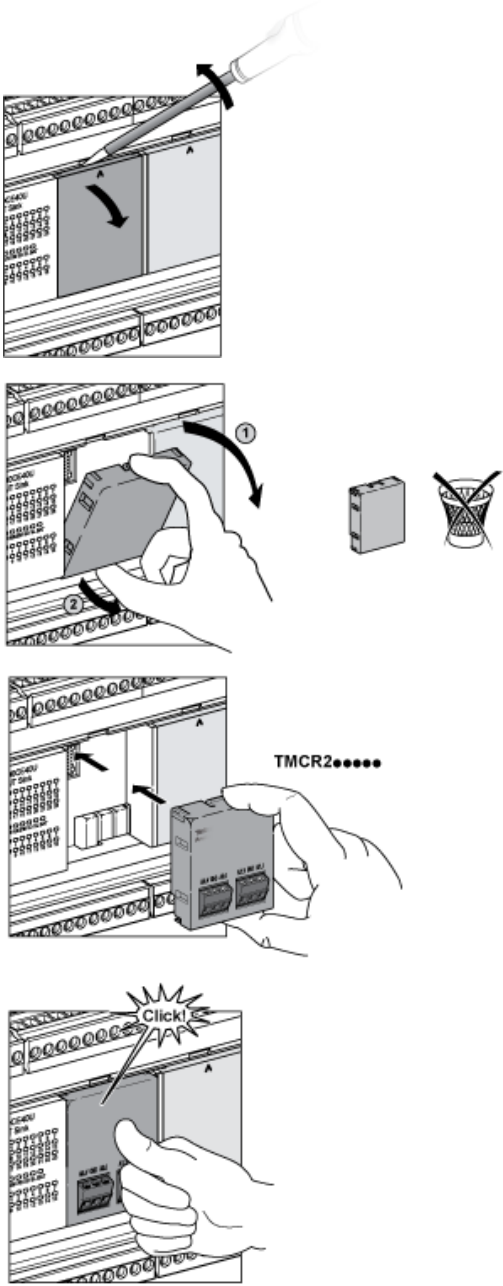

## TMCR2... De-Installation

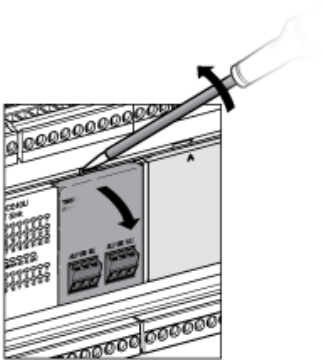




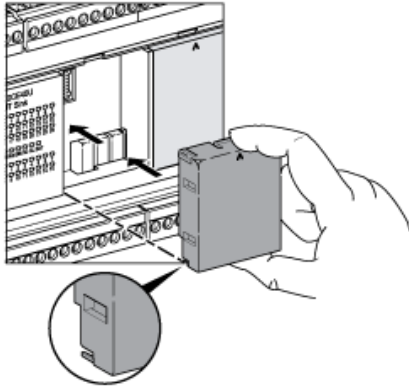


Wiring Diagram / Connections Schema

DC Power Supply

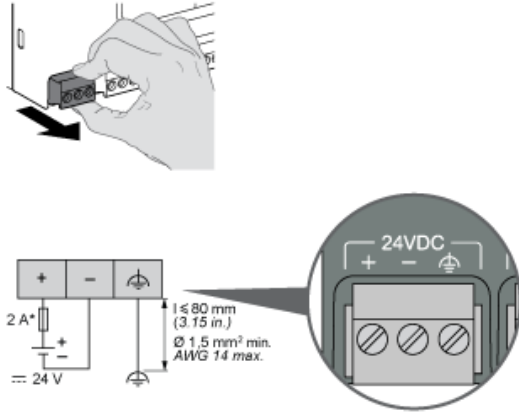


(\*) Type T fuse

Digital Inputs (Sink or Source)

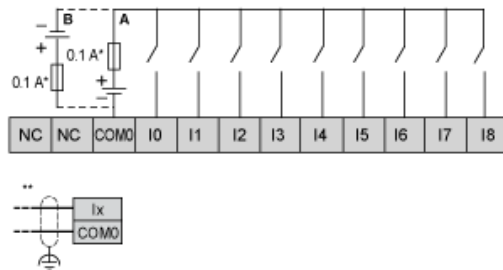


(\*) Type T fuse  
A : Sink wiring (positive logic)  
B : Source wiring (negative logic)  
(\*\*) Fast inputs

Regular and Fast Transistor Output

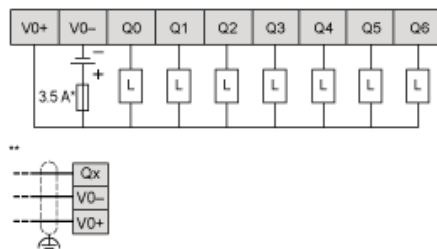


(\*) Type T fuse  
(\*\*) Fast inputs  
(1) The V0+ and V1+ terminals are not connected internally.  
(2) The V0- and V1- terminals are not connected internally.

## USB Mini-B Connection

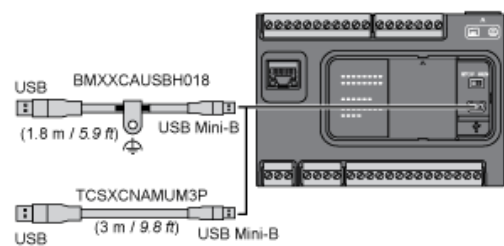


## SL1 Connection

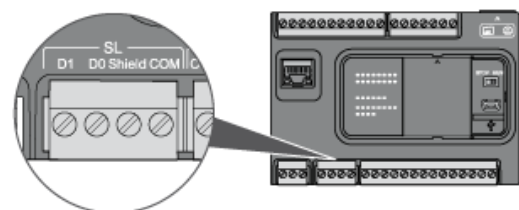

D1 : D1 (A+)  
D0 : D0 (B-)  
Shield : Shield  
COM : 0 V Com

Derating Curves

Digital Inputs

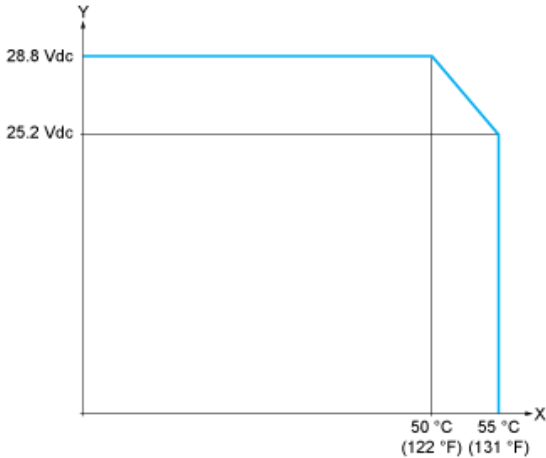

X : Ambient temperature (°C / °F)  
Y : Input voltage (V)