



Main

| | |
|-----------------------------|--|
| Range of product | Easy Modicon M200 |
| Product or component type | Logic controller |
| [Us] rated supply voltage | 24 V DC |
| Discrete I/O number | 24 |
| Discrete input number | I2...I5: 4 fast input I0, I1, I6, I7: 4 high speed input I8...I13: 6 regular input |
| Discrete output number | Q0...Q1: 2 fast output (PLS/PWM/PTO mode) Q2...Q9: 8 transistor output |
| Discrete input voltage | 24 V |
| Discrete input voltage type | DC |
| Discrete input current | 7 mA for input |
| Discrete input logic | Sink or source (positive/negative) type 1 conforming to EN/IEC 61131-2 |
| Discrete output voltage | 24 V DC |
| Discrete output current | 0.5 A |
| Discrete output type | Transistor |
| Discrete output logic | Negative logic (sink) |
| Power consumption in W | 10 W at 24 V DC (with max I/O) |

Complementary

| | |
|--|--|
| Maximum number of I/O expansion module | 4 with 64 discrete output(s) for relay output 4 with 138 discrete output(s) for transistor output |
| Supply voltage limits | 20.4...28.8 V |
| Inrush current | 35 A |
| Voltage state 1 guaranteed | ≥ 15 V for input |
| Voltage state 0 guaranteed | ≤ 5 V for input |
| Input impedance | 3.3 kOhm for discrete input |
| Response time | 1 ms turn-on, Q0...Q9 terminal(s) for output 1 ms turn-off, Q0...Q9 terminal(s) for output |

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

| | |
|--|--|
| | <p>5 μs turn-off, I0, I1, I6, I7 terminal(s) for high speed input</p> <p>5 μs turn-on, I0, I1, I6, I7 terminal(s) for high speed input</p> <p>100 μs turn-off, I2...I5 terminal(s) for fast input</p> <p>35 μs turn-on, I2...I5 terminal(s) for fast input</p> <p>100 μs turn-off, I8...I13 terminal(s) for regular input</p> <p>35 μs turn-on, I8...I13 terminal(s) for regular input</p> |
| Configurable filtering time | <p>0 ms for input</p> <p>3 ms for input</p> <p>12 ms for input</p> |
| Maximum current per output common | <p>2 A at COM 0</p> <p>3 A at COM 1</p> |
| Output frequency | 100 kHz for fast output (PWM/PLS mode) at Q0...Q1 |
| Maximum leakage current | 0.1 mA for transistor output |
| Maximum voltage drop | <1 V |
| Maximum tungsten load | <12 W for output and fast output |
| Protection type | Overload and short-circuit protection at 3.8 A |
| Reset time | 1 s automatic reset |
| Memory capacity | 512 byte internal flash for backup of programs |
| Data storage equipment | 32 GB micro SD card (optional) |
| Battery type | BR2032 Li-CFx (Lithium-Carbon Monofluoride), battery life: 5 year(s) |
| Backup time | 3 years at 25 °C (by interruption of power supply) |
| Execution time for 1 KInstruction | 0.3 ms for event and periodic task |
| Execution time per instruction | 0.2 μ s Boolean |
| Exct time for event task | 60 μ s response time |
| Clock drift | <= 90 s/month at 25 °C |
| Regulation loop | Adjustable PID regulator up to 14 simultaneous loops |
| Positioning functions | PWM/PLS 2 channel(s) at 100 kHz |
| Control signal type | <p>Quadrature (x1, x2, x4) at 100 kHz for fast input (HSC mode)</p> <p>Pulse/direction at 100 kHz for fast input (HSC mode)</p> <p>Single phase at 100 kHz for fast input (HSC mode)</p> <p>CW/CCW at 100 kHz for fast input (HSC mode)</p> |
| Counting input number | 4 fast input (HSC mode) at 100 kHz 32 bits |
| Integrated connection type | <p>USB port with mini B USB 2.0 connector</p> <p>Non isolated serial link serial 1 with terminal block connector and RS485 interface</p> <p>Non isolated serial link serial 2 with terminal block connector and RS232/RS485 interface</p> <p>Isolated serial link serial 2 with terminal block connector and RS485 interface</p> |
| Transmission rate | <p>1.2...115.2 kbit/s (115.2 kbit/s by default) for bus length of 15 m for RS485</p> <p>1.2...115.2 kbit/s (115.2 kbit/s by default) for bus length of 3 m for RS232</p> <p>12 Mbit/s for USB</p> |
| Communication port protocol | <p>USB port: USB - SoMachine-Network</p> <p>Non isolated serial link: Modbus master/slave - RTU/ASCII or SoMachine-Network</p> |
| Local signalling | <p>1 LED (green)PWR:</p> <p>1 LED (green)RUN:</p> <p>1 LED (red)module error (ERR):</p> <p>1 LED (green)SD card access (SD):</p> <p>1 LED (red)BAT:</p> <p>1 LED (green)SL1:</p> <p>1 LED per channel (green)I/O state:</p> |
| Electrical connection | <p>Mini B USB 2.0 connectorfor a programming terminal</p> <p>removable screw terminal blockfor inputs</p> <p>removable screw terminal blockfor outputs</p> <p>removable screw terminal block, 3 terminal(s) for connecting the 24 V DC power supply</p> <p>removable screw terminal block, 4 terminal(s) for connecting the serial link1</p> |
| Maximum cable distance between devices | <p>Unshielded cable: <50 m for input</p> <p>Shielded cable: <10 m for fast input</p> <p>Shielded cable: <10 m for high speed input</p> <p>Unshielded cable: <150 m for output</p> |
| Insulation | <p>Non-insulated between inputs</p> <p>Between input and internal logic at 500 V AC</p> <p>Between fast input and internal logic at 500 V AC</p> <p>Between input groups at 500 V AC</p> <p>Between output and internal logic at 500 V AC</p> <p>Between output groups at 500 V AC</p> <p>Between supply and internal logic at 500 V DC</p> |

| | |
|------------------|---|
| Marking | CE |
| Mounting support | Top hat type TH35-15 rail conforming to IEC 60715 Top hat type TH35-7.5 plate or panel with fixing kit conforming to IEC 60715 |
| Height | 90 mm |
| Depth | 70 mm |
| Width | 130 mm |
| Net weight | 0.382 kg |

Environment

| | |
|---------------------------------------|---|
| IP degree of protection | IP20 with protective cover in place |
| Product certifications | CSA CULus RCM IACS E10 |
| Standards | EN/IEC 61131-2 EN/IEC 61010-2-201 |
| Electromagnetic compatibility | Electrostatic discharge immunity test - test level: 8 kV (air discharge) conforming to EN/IEC 61000-4-2 Electrostatic discharge immunity test - test level: 6 kV (contact discharge) conforming to EN/IEC 61000-4-2 Susceptibility to electromagnetic fields - test level: 10 V/m (80 MHz...3 GHz) conforming to EN/IEC 61000-4-3 Magnetic field at power frequency - test level: 30 A/m conforming to EN/IEC 61000-4-8 Electrical fast transient/burst immunity test - test level: 2 kV (power lines) conforming to EN/IEC 61000-4-4 Electrical fast transient/burst immunity test - test level: 2 kV (relay output) conforming to EN/IEC 61000-4-4 Electrical fast transient/burst immunity test - test level: 1 kV (I/O) conforming to EN/IEC 61000-4-4 Electrical fast transient/burst immunity test - test level: 1 kV (serial link) conforming to EN/IEC 61000-4-4 1.2/50 μ s shock waves immunity test - test level: 1 kV (power lines (DC)) conforming to EN/IEC 61000-4-5 1.2/50 μ s shock waves immunity test - test level: 2 kV (power lines (AC)) conforming to EN/IEC 61000-4-5 1.2/50 μ s shock waves immunity test - test level: 2 kV (relay output) conforming to EN/IEC 61000-4-5 1.2/50 μ s shock waves immunity test - test level: 1 kV (I/O) conforming to EN/IEC 61000-4-5 1.2/50 μ s shock waves immunity test - test level: 1 kV (shielded cable) conforming to EN/IEC 61000-4-5 1.2/50 μ s shock waves immunity test - test level: 0.5 kV (power lines (DC)) conforming to EN/IEC 61000-4-5 1.2/50 μ s shock waves immunity test - test level: 1 kV (power lines (AC)) conforming to EN/IEC 61000-4-5 Conducted RF disturbances - test level: 10 V (0.15...80 MHz) conforming to EN/IEC 61000-4-6 Conducted emission - test level: 79 dB μ V/m QP/66 dB μ V/m AV (power lines (AC)) conforming to EN/IEC 55011 Conducted emission - test level: 73 dB μ V/m QP/60 dB μ V/m AV (power lines (AC)) conforming to EN/IEC 55011 Radiated emission - test level: 40 dB μ V/m QP class A (10 m) conforming to EN/IEC 55011 Radiated emission - test level: 47 dB μ V/m QP class A (10 m) conforming to EN/IEC 55011 1.2/50 μ s shock waves immunity test - test level: 1 kV (relay output) conforming to EN/IEC 61000-4-5 |
| Shock resistance | 15 gn for 11 ms 30 gn for 6 ms |
| Immunity to microbreaks | 2 ms |
| Vibration resistance | 3.5 mm at 5...8.4 Hz on symmetrical rail 1 gn at 8.4...150 Hz on symmetrical rail 3.5 mm at 5...8.7 Hz on panel mounting 2 gn at 8.7...150 Hz on panel mounting |
| Relative humidity | 10...95 %, without condensation (in operation) 10...95 %, without condensation (in storage) |
| Ambient air temperature for operation | 0...55 °C (horizontal installation) |
| Ambient air temperature for storage | -25...70 °C |
| Pollution degree | \leq 2 |
| Operating altitude | 0...2000 m |
| Storage altitude | 0...3000 m |

Packing Units


| | |
|------------------|-----------|
| Package 1 Weight | 5.800 kg |
| Package 1 Height | 9.000 cm |
| Package 1 width | 13.800 cm |
| Package 1 Length | 13.700 cm |

Offer Sustainability

| | |
|----------------------------|---|
| Sustainable offer status | Green Premium product |
| EU RoHS Directive | Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration |
| Mercury free | Yes |
| RoHS exemption information | Yes |
| China RoHS Regulation | China RoHS declaration |
| Environmental Disclosure | Product Environmental Profile |
| Circularity Profile | End of Life Information |
| WEEE | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins |


Dimensions Drawings

Dimensions

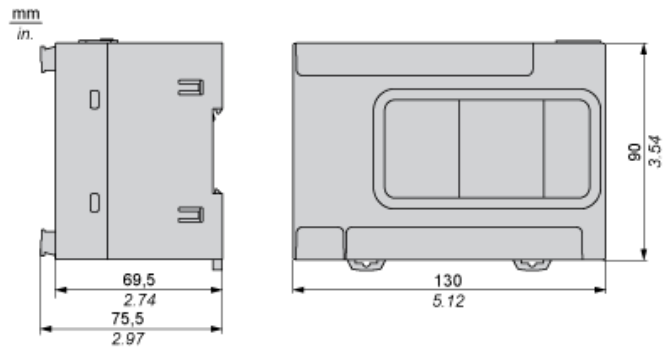


Mounting and Clearance


Mounting on a Rail


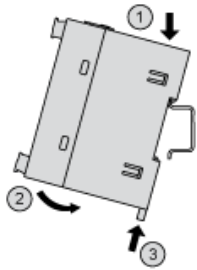


Direct Mounting on a Panel Surface

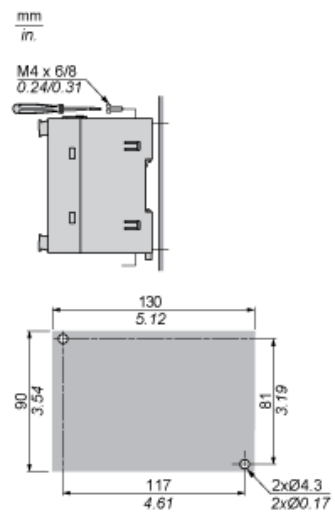



Mounting Position

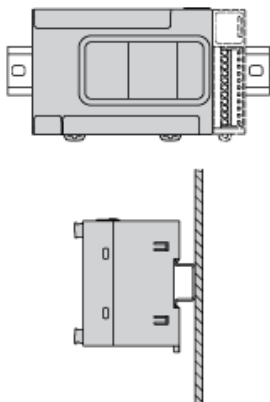




Clearance


mm
in.


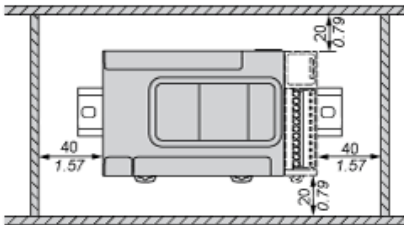


TMCR2...Installation

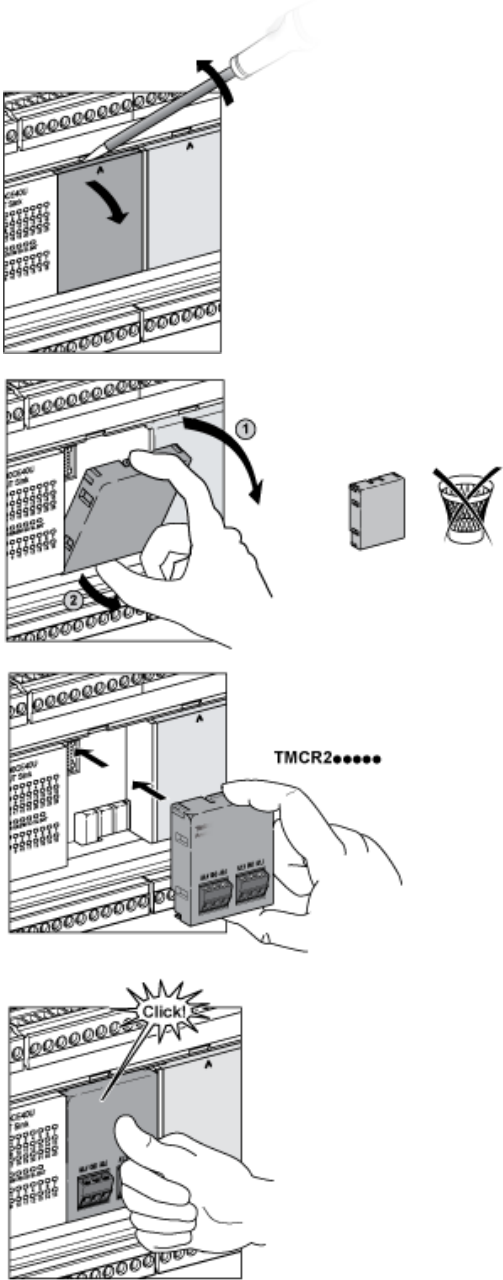



TMCR2... De-Installation

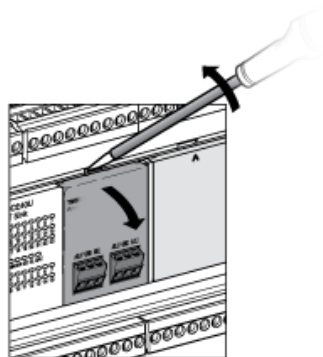

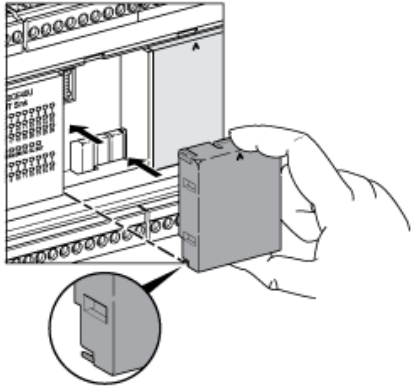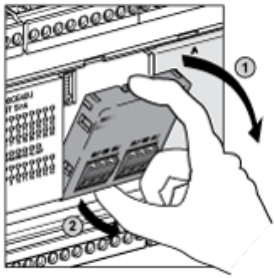




Wiring Diagram / Connections Schema

DC Power Supply

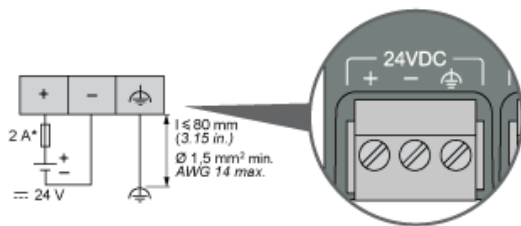



(*) Type T fuse

Digital Inputs (Sink or Source)

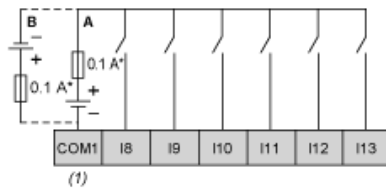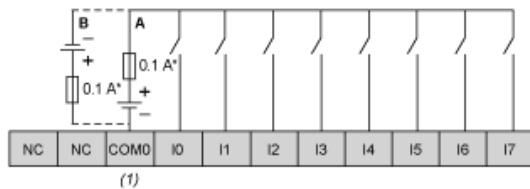


- (*) Type T fuse
- (**) Fast inputs
- A : Sink wiring (positive logic)
- B : Source wiring (negative logic)
- (1) The COM0 and COM1 terminals are not connected internally.

Regular and Fast Transistor Output

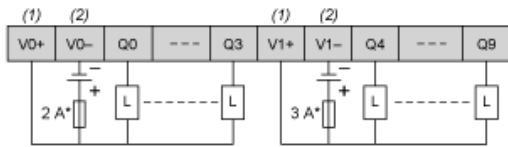


- (*) Type T fuse
- (**) Fast inputs
- (1) The V0+ and V1+ terminals are not connected internally.
- (2) The V0- and V1- terminals are not connected internally.

USB Mini-B Connection

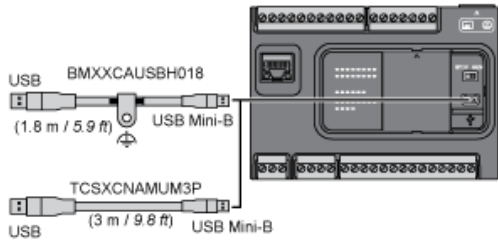

SL1 Connection

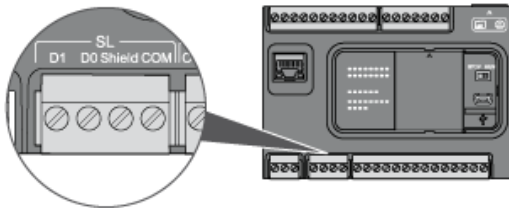

- D1 : D1 (A+)
- D0 : D0 (B-)
- Shield : Shield
- COM : 0 V Com